

FiberSource | Plug-In Converter



Optical Plug-In Converters connect different kinds of connector types ensuring a low connection loss. The Plug In Converter consists of a plug and jack at the both ends. The plug side (Male Side) consists of the same configuration as an SC Connector and the jack side (Female Side) consists of the same configuration as an LC or MU Connector. The Plug-In Converter can be used by inserting the SC Side (Male Side) into a transceiver or instrument which has an SC Adapter configuration and the other end (Female Side) can be converted to an MU or LC configuration.

FiberSource Plug-In Adapters for LC-SC and MU-SC type configurations are composed of special converting ferrules. These converters are of high reliability, low insertion loss, and stable mating durability.

All of FiberSource Plug-In Adapters are composed of top quality Zirconia Ferrules and Split Sleeves ensuring stable performance at a high quality level.

Specifications


Features

- [+] Telcordia GR-326 Core Tested
- [+] Operational Temperature: -40°C~+85°C
- [+] Durability: 500 Matings
- [+] Singlemode
- [+] 62.5/125 Multi Mode
- [+] 50/125 Multi Mode


Ordering Information

FS01538 LCU-SCU Singlemode Only
FS01595 LC-SC 62.5/125 Multi Mode Only
FS01596 LC-SC 50/125 Multi Mode Only

Converters Front

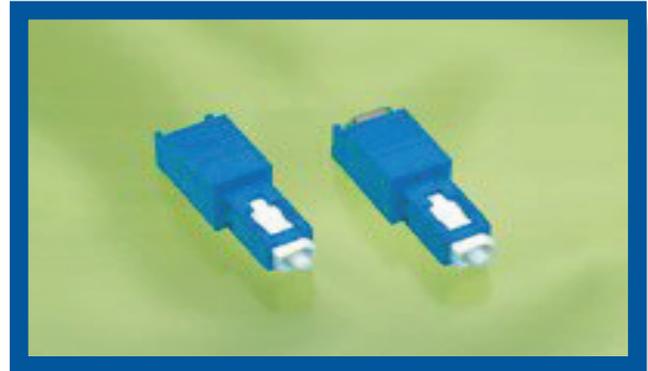

Converters Back

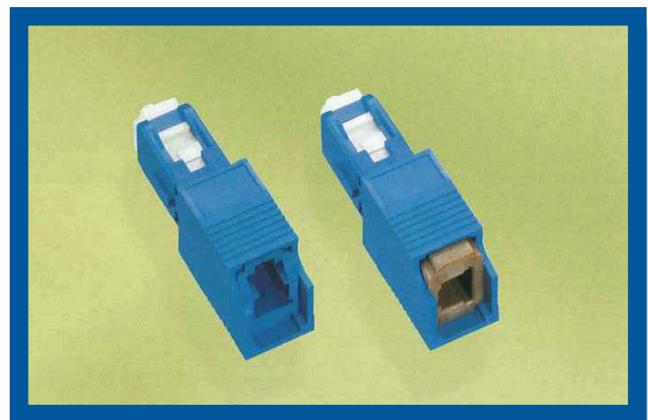

*Call your FiberSource Representative for cable type availability. Some variations may have limited availability or may be subject to minimum order quantity requirements.

FiberSource | Precision Connectivity Solutions

www.fibersource.net

sales@fibersource.net

888.342.3776



7034 Augusta Road, Greenville, South Carolina 29605 USA / International +1 864.277.7200
Issue Date: 7.20.2009 V2 / FSO